

# Technical data sheet

## Screw plug, PG thread

Item number: 2090632



Metal screw plug with integrated sealing ring To close unused threaded openings, e.g. in housings or junction and branch boxes. With PG thread to DIN EN 46320 or DIN 40430. Protection class IP 68 (5 bar/1 h).



Brass



Nickel-plated

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2090632                  |
| Type                               | 168 MS PG48 + O          |
| Description 1                      | Screw plug               |
| Description 2                      | with O ring              |
| Manufacturer                       | OBO                      |
| Dimension                          | Ø64x16                   |
| Material                           | Brass                    |
| Surface                            | Nickel-plated            |
| Surface standard                   |                          |
| Smallest sales unit                | 25                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 0.155 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0089 kg CO2e / 1 Piece |


# Technical data sheet

## Screw plug, PG thread

Item number: 2090632



### Dimensions

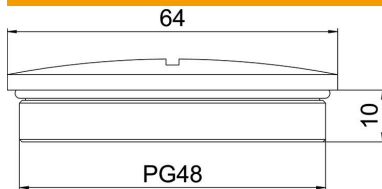

|             |       |
|-------------|-------|
| Length      | 64 mm |
| Width       | 64 mm |
| Height      | 16 mm |
| Dimension D | 64 mm |
| Dimension L | 10 mm |

### Technical data

|                               |         |
|-------------------------------|---------|
| explosion-proof               | no      |
| For Ex zone gas               | Without |
| For Ex zone dust              | Without |
| Thread                        | Pg 48   |
| Thread type                   | PG      |
| Nominal thread size metric/PG | 48      |
| Thread increase               | 1.59 mm |
| Fibre-glass reinforced        | no      |
| Halogen-free                  | yes     |
| Impact-resistant              | no      |
| Protection rating             | IP68    |