


Technical data sheet

Internal corner, for device installation trunking Rapid 80 type GKH-70170

Item number: 6114360



Internal corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

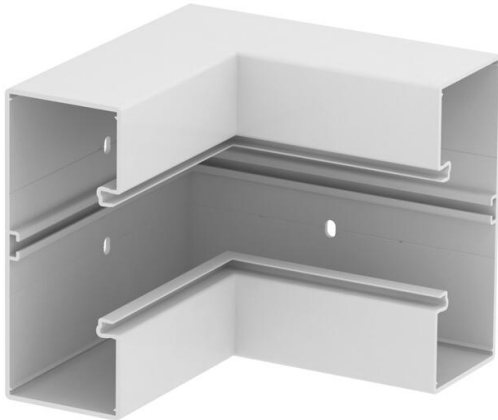

Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

Item number	6114360
Type	GKH-I70170RW
Description 1	Internal corner, halogen-free
Manufacturer	OBO
Dimension	70x170
Colour	Pure white; RAL 9010
Material	Polycarbonate/Acrylnitrile-butadiene-styrene
Smallest sales unit	1
Unit of quantity	Piece
Weight	100 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	6,3095 kg CO2e / 1 Piece


Technical data sheet

Internal corner, for device installation trunking Rapid 80 type GKH-70170

Item number: 6114360



Dimensions

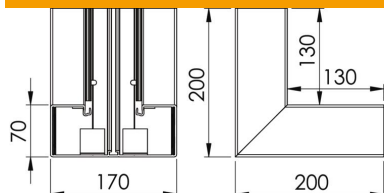

Length	200 mm
Width	170 mm
Height	70 mm

Technical data

Number of covers	1
Version for	Base
Shape	Symmetrical
for duct width	170 mm
for trunking height	70 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Cover width	76.5 mm
Cover width 2	0 mm
Cover width 3	0 mm
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK08
Permitted temperature range, max.	90 °C
Permitted temperature range, min.	-15 °C
Angle range, max.	90 mm
Angle range, min.	90 mm