


Technical data sheet

Perforated strip for PV free-standing system

Item number: 5901950

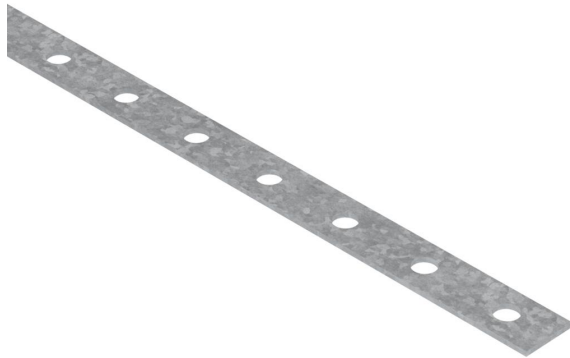

Perforated strip for cross-connecting the rear supports of pre-mounted supports type VT 10/25/30. For stiffening PV mounting systems free-standing. Fastening with screw set for perforated strip type SVLB. Fastening material not included in scope of delivery.



St	Steel
FT	Hot-dip galvanised

Master data

Item number	5901950
Type	LB FT
Description 1	Perforated strip
Description 2	for free-standing system
Manufacturer	OBO
Dimension	30x2000x3
Colour	zinc
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	10
Unit of quantity	Piece
Weight	144 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	2,9946 kg CO2e / 1 Piece


Technical data sheet

Perforated strip for PV free-standing system

Item number: 5901950



Dimensions



Length	2,000 mm
Width	30 mm
Height	3 mm
Dimension A	50 mm

Technical data

Version for	Perforated
Hole diameter	13 mm
With perforation	yes
Perforation	Round
Type of band	Straight
In the holder	no