

Design freedom



The new
UDHOME-ONE
floor socket

The UDHOME-ONE floor socket


For use in thin screeds

The smallest and most sustainable member of the product family – even flatter and thus more energy-efficient due to the increased heating dynamics.

Height adjustment to floor height


The frame of the UDHOME-ONE can be adjusted to the top edge of the floor covering using four integrated height-adjustment supports. The height-adjustment range of the UDHOME-ONE is always 75–105 mm, regardless of the type of cover.

Quick and easy to install

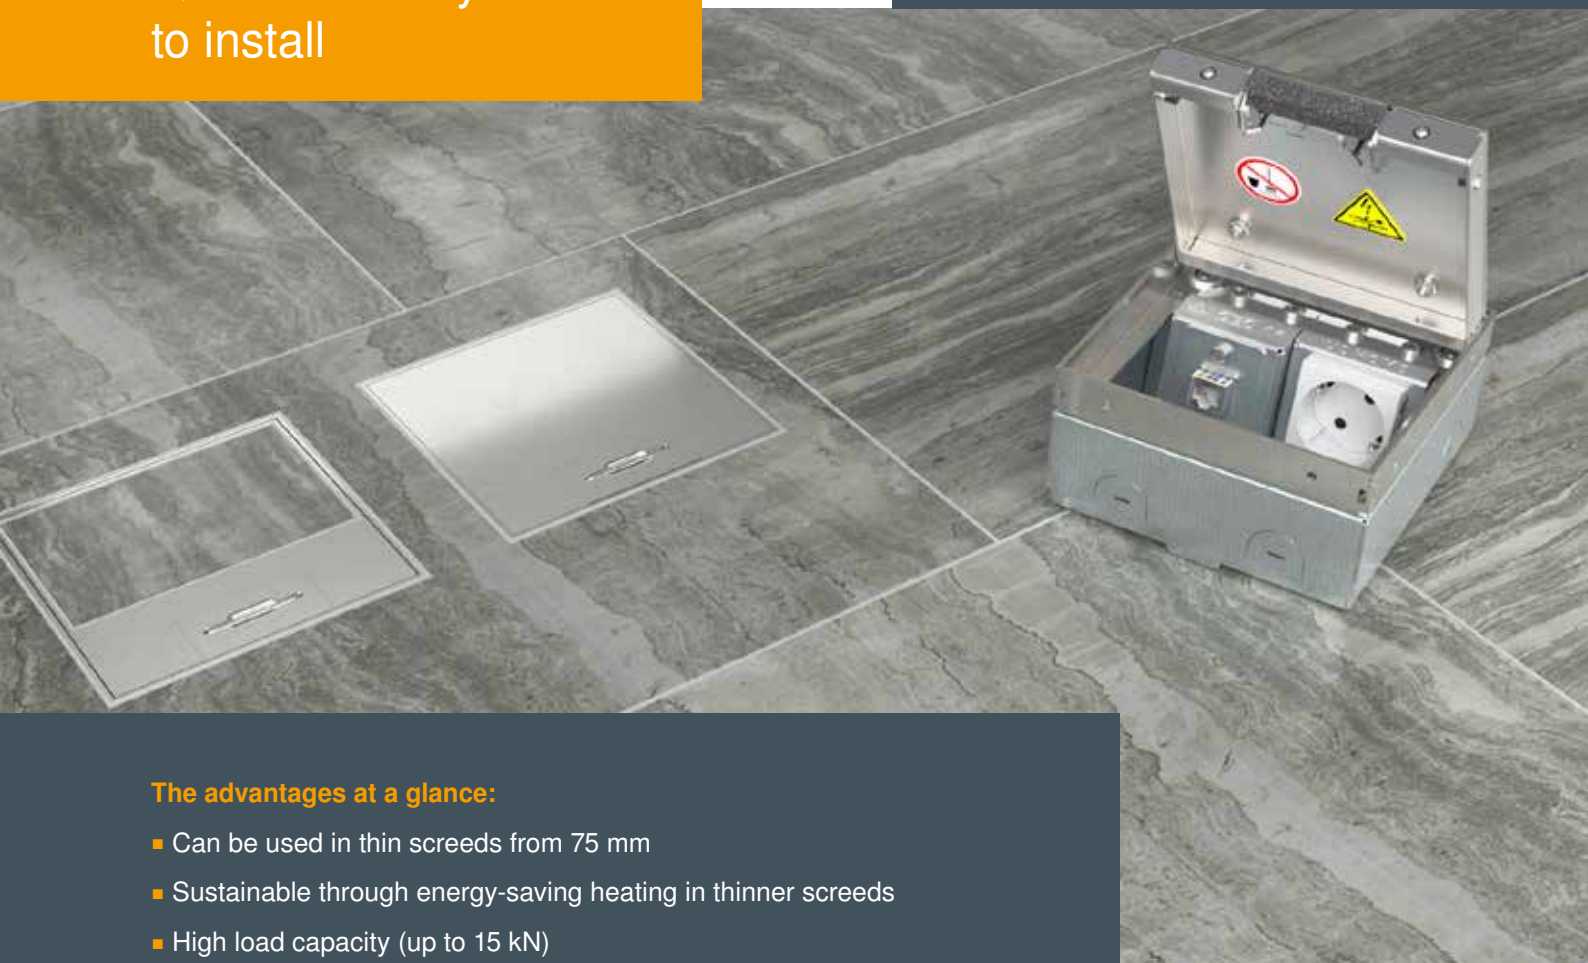

The advantages at a glance:

- Can be used in thin screeds from 75 mm
- Sustainable through energy-saving heating in thinner screeds
- High load capacity (up to 15 kN)
- Flexible equipment
- Cover can still be closed even when plugs are inserted
- VDE-certified
- Height-adjustment range of up to +30 mm

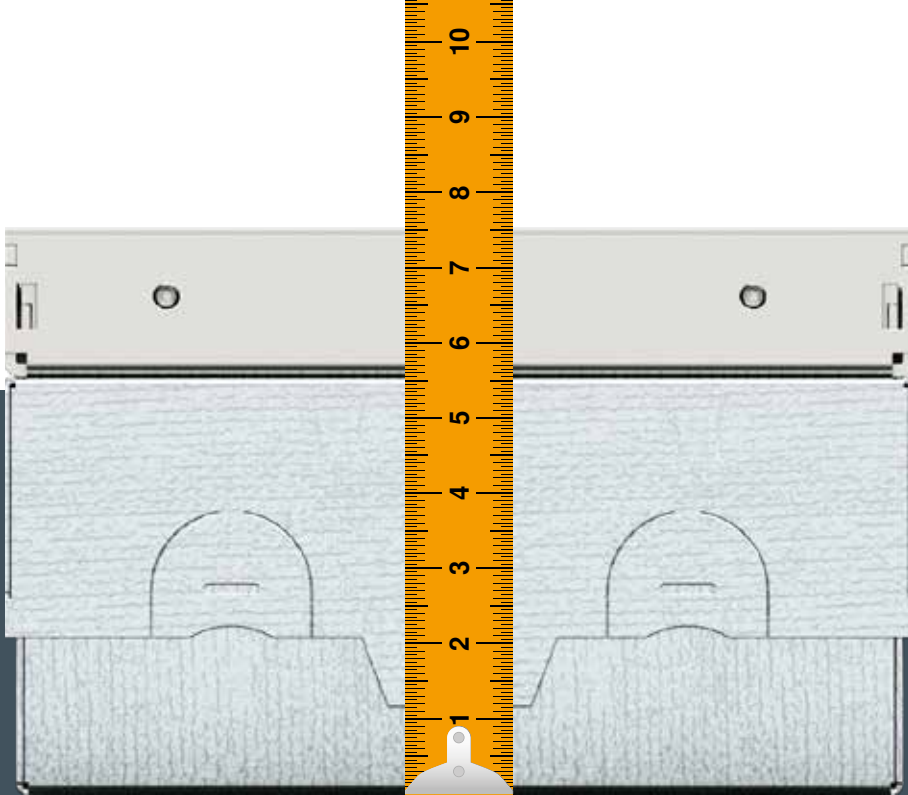

UDHOME-ONE floor socket

140 x 140

1 Modul 45® device

1 data technology module

Space-saving floor installation


The floor sockets are mounted directly on the raw floor (RFB), connected with flexible installation pipes and then worked flush into the screed. Thanks to the height-adjustment mechanism, the UDHOME-ONE can also be installed in floors of up to 105 mm high.

Device installation

The UDHOME-ONE floor socket is preconfigured with VDE installation devices. A variant with an empty mounting support is also available.

Various data technology plates are available for the mounting of the data technology modules.


A double Modul 45® mounting support is available as an accessory for the later conversion of a UDHOME-ONE.

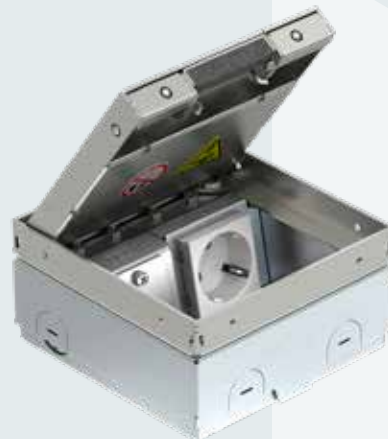

Pre-equipped with:

1 Modul 45® socket

1 data technology blanking plate



Data technology plate for optional installation of a data technology module. Optionally, a mounting support to accept up to 2 Modul 45® installation devices is available.

OBO Bettermann Holding GmbH & Co. KG

P.O. Box 1120
58694 Menden
GERMANY

Customer Service

Tel.: +49 (0)2373 89-17 00
Fax: +49 (0)2373 89-12 38
export@obo.de

www.obo-bettermann.com

© OBO Bettermann Best.-Nr. 9137883 12/2022 EN

Building Connections

