

Technical data sheet

Clamp clip, single, FT plastic pressure trough

Item number: 1169521



Suitable for flat, bracket and U irons of 4–12 mm material thickness.
Clip and bolt made of hot-dip galvanised steel.
Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.
Version with welding and/or locknuts for use under difficult circumstances and for
shake protection on request.



- St

Steel
- FT

Hot-dip galvanised

Master data	
Item number	1169521
Description 1	Clamp clip
Manufacturer	OBO
Dimension	46-52mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	100
Unit of quantity	Piece
Weight	9.2 kg
Weight unit	kg/100 pc.
CO Footprint (GWP) Cradle-to-Gate	0,2256 kg COe / 1 Piece


Technical data sheet

Clamp clip, single, FT plastic pressure trough

Item number: 1169521



Dimensions

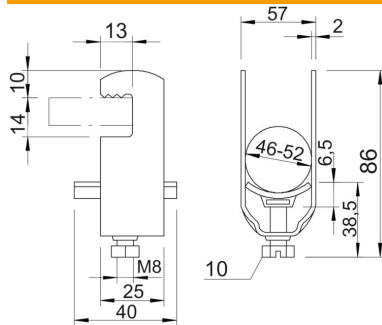

Dimension A	25 mm
Dimension B	57 mm
Dimension C	40 mm
Dimension E	13 mm
Dimension G (mm)	M8
Dimension H	86 mm
Dimension L	38.5 mm
Dimension t	2 mm
Dimension x	6.5 mm

Technical data

Number of cables/pipes	1
for 1 cable H	86 mm
for 1 cable L	38.5
for 2 cable H	140 mm
for 2 cable L	45.5 mm
For pipe diameter, max.	50 mm
For pipe diameter, min.	50 mm
Halogen-free	yes
Max. Tightening torque	5 Nm
With plastic trough	yes
With metal trough	no
Mounting type	Flat profile
Impact-resistant	no
Clamping range D, max.	52 mm
Clamping range D, min.	46 mm
Surface addition	hot galvanised
Material addition	Steel
With counter-trough	no
Material of trough	Plastic
Material quality of trough	Polypropylene